

**WICONA®**  
TECHNIK FÜR IDEEN



## » WICSTAR handle controlled opening limiter

Completely concealed, stepless locking limiter for turn-only windows. Safeguarded stepless opening position up to 90° by simple, one-handed window handle actuation.



Comfort



Sash can  
be locked in  
any position




Simple and fast  
attachement

## Technology meets comfort


If ingenious technology not only functions reliably but also provides users with additional comfort, then it is WICSTAR, WICONA's precision hardware range.

Example? – The handle controlled opening limiter. Allows fresh air to flow in the twinkling of an eye without the risk of a gust of wind hitting the window sash.

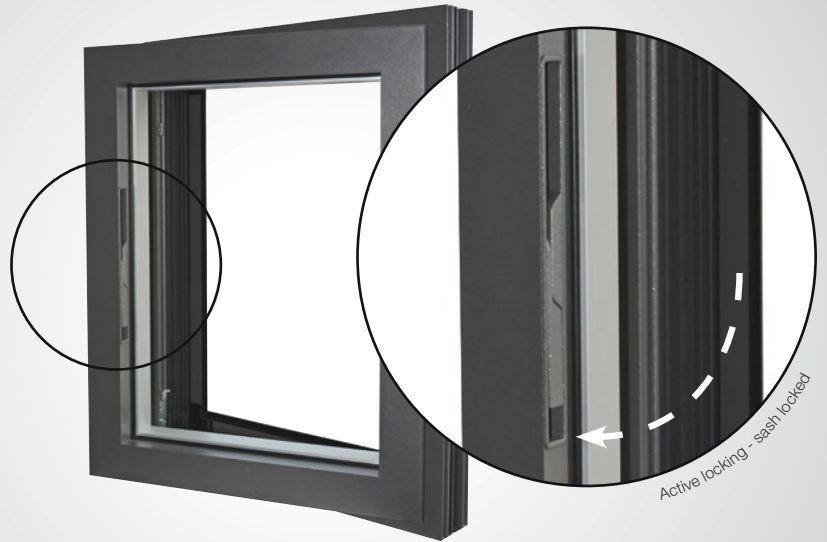

Visualization with concealed handle.  
Exclusively available from WICONA!

 Tender text  
[www.wictim.com/WSOA](http://www.wictim.com/WSOA)

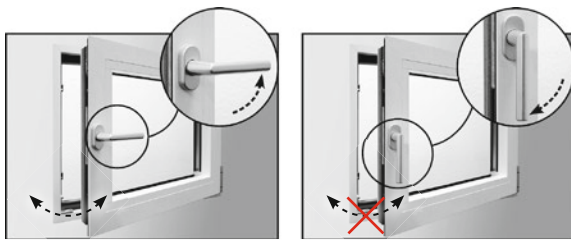

Opening-position –  
for individual opening width

Locking mechanism active –  
sash locked

### Operation:

- Open the sash as usual via the turning handle
- Secure the sash in the desired position by turning the handle downwards
- Release the secured sash by turning the handle back to the opening position

### Classification key according to DIN EN 13126-5:2015-01

Durability:	5
Mass:	200
Fire:	0
Safety in use:	3/3
Corrosion:	5
Application part:	5/6
Specification (w x h mm):	1220 x 3020

## » WICSTAR handle controlled opening limiter

Fully concealed and continuously lockable, the WICSTAR opening limiter can be easily controlled via the window handle (one-handed operation) and that can ensure a stepless opening position from 20° up to 90°.


The locking of the handle controlled opening limiter is achieved by friction. Additionally, the opening restrictor is equipped with an end stop at 90°, in order to prevent the sash from hitting the window rebate or to prevent damage on the hinges due to over twisting.

Typical WICONA: WICSTAR hardware technology works in secret. The handle controlled opening limiter is concealed, nothing disturbs the profile design of the window sash.

Two different scissor sizes allow you to fasten and secure sashes from 650 up to 1700 mm sash width.

### Features:

- One-handed operation via window handle
- stufenlos feststellbar ab ca. 20°
- Fully concealed
- Prevents autonomous movement of the sash
- Maintenance free
- All parts made from rust-resistant materials
- Frame section screwable or clampable, sash part clampable (punching screws)
- Opening restrictor can be unhooked
- Can be used right and left
- Can be used top and bottom
- for inward- and outward opening turn-only window
- For visible and concealed hinges



unhooked frame bracket